


LIEBHERR

OFFSHORE CRANE ELECTRO-HYDRAULIC RAM LUFFING TYPE

RL-T 2650-50

MAIN HOIST 1-fall operation boom extended

SWH [m]		Onboard	0.5	1.0	1.4	2.0	2.2
Radius [°]	Radius [m]	SWL [t]					
56.6	4.0	50.0	50.0	50.0	47.0	31.0	25.0
53.2	6.0	50.0	50.0	50.0	43.5	28.5	25.0
49.8	8.0	50.0	50.0	50.0	40.0	26.0	22.0
46.4	11.0	50.0	50.0	46.5	37.5	24.0	20.0
43.0	12.5	50.0	50.0	43.5	35.0	22.0	18.0
39.6	14.0	43.5	43.5	40.0	32.5	20.0	17.0
36.2	15.5	38.5	38.5	37.0	30.0	18.5	16.0
32.8	17.0	34.5	34.5	33.5	27.5	17.5	15.5
29.4	18.5	30.5	30.5	30.0	24.5	16.5	15.0
26.0	20.0	27.5	27.5	26.5	22.0	16.0	14.5
22.6	22.0	23.5	23.5	23.0	19.5	15.5	14.0
19.2	24.0	20.0	20.0	19.0	17.0	14.5	13.5
15.8	26.0	17.0	17.0	17.0	15.5	13.5	13.0
12.4	28.0	15.0	15.0	15.0	14.0	12.5	12.0
9.0	30.0	13.0	13.0	13.5	12.5	11.5	11.0
5.6	32.0	11.5	11.5	12.0	11.0	10.5	10.0
2.2	34.0	10.0	10.0	10.5	10.0	9.5	9.0

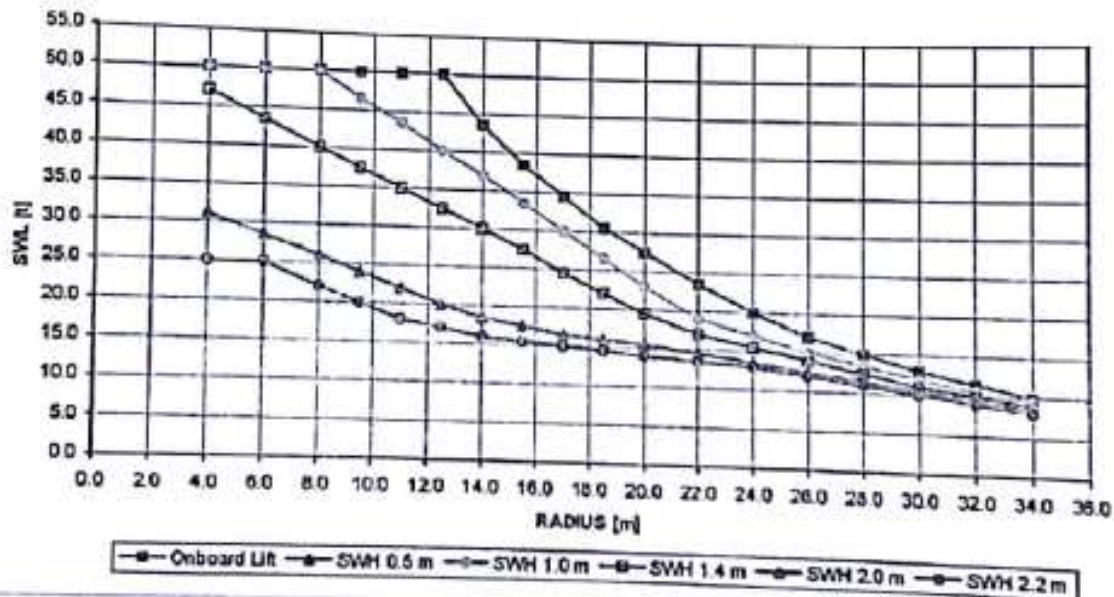

Operational conditions for Personnel Lift:
No personnel lift operation available

Calculation Method:
General Method based on API 2C, 6th Edition