


LIEBHERR

OFFSHORE CRANE ELECTRO-HYDRAULIC RAM LUFFING TYPE RL-T 2650-50

MAIN HOIST 1-fall subsea operation boom retracted

SWH [m]		0.5	1.0	1.4	2.0
Radius [°]	Radius [m]	SWL [t]			
84.0	4.0	50.0	50.0	50.0	35.0
78.2	6.0	50.0	50.0	50.0	35.0
72.1	8.0	50.0	50.0	41.0	27.0
67.4	9.5	50.0	50.0	34.0	20.5
62.6	11.0	50.0	40.5	27.5	14.5
57.4	12.5	50.0	32.5	22.0	11.0
51.9	14.0	37.5	24.5	18.5	8.5
45.9	15.5	25.0	17.0	12.0	6.0
39.1	17.0	20.0	14.0	9.5	4.0
31.0	18.5	17.0	12.0	7.5	3.0
19.6	20.0	15.5	10.0	5.5	2.0

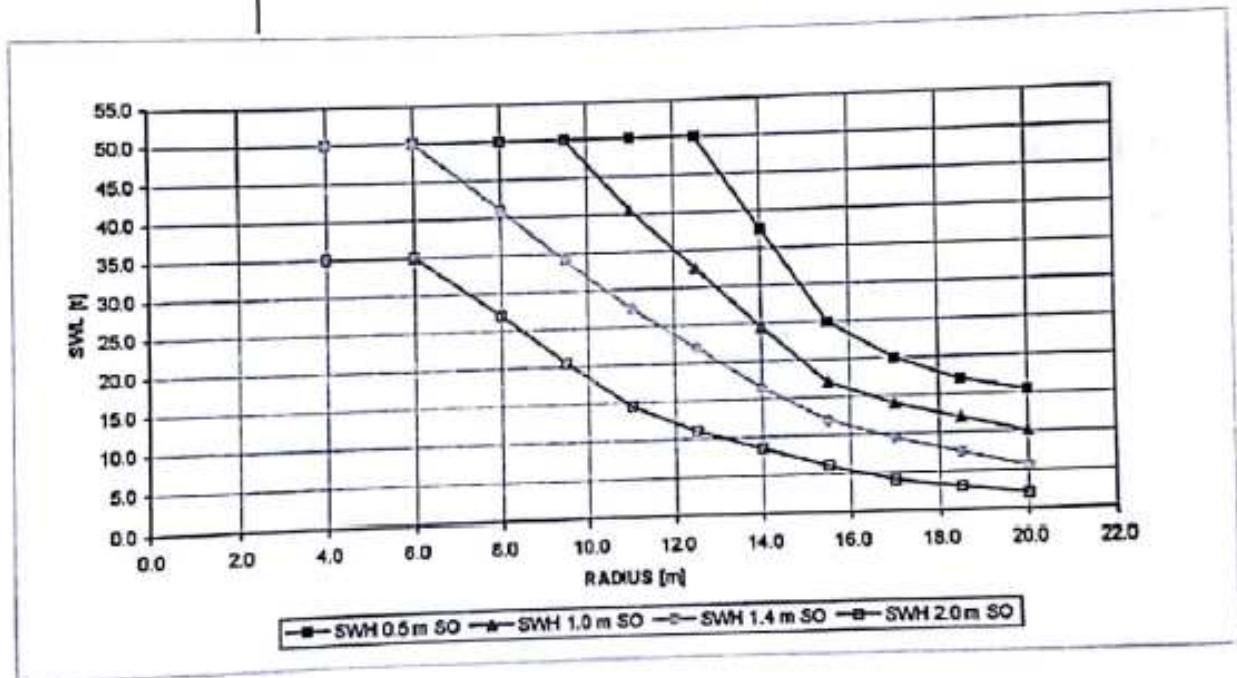

- 0 = Offboard Lift, SWH 0.5 m SO
- 1 = Offboard Lift, SWH 1.0 m SO
- 2 = Offboard Lift, SWH 1.4 m SO
- 3 = Offboard Lift, SWH 2.0 m SO
- SO = Subsea Operation up to depth of 500 m

Operational conditions for Personnel Lift:
No personnel lift operation available

Calculation Method:
General Method based on API 2C, 6th Edition