


LIEBHERR

OFFSHORE CRANE ELECTRO-HYDRAULIC RAM LUFFING TYPE RL-T 2650-50

WHIP HOIST 1-fall operation boom retracted

SWH [m]		Onboard	0.5	1.0	1.4	2.0
Radius [°]	Radius [m]	SWL [t]				
82.1	6.0	5.0	5.0	3.0	2.5	2.0
77.2	8.0	5.0	5.0	3.0	2.5	2.0
72.1	10.0	5.0	5.0	3.0	2.5	2.0
66.9	12.0	5.0	5.0	3.0	2.5	2.0
61.4	14.0	5.0	5.0	3.0	2.5	2.0
55.5	16.0	5.0	5.0	3.0	2.5	2.0
49.0	18.0	5.0	5.0	3.0	2.5	2.0
41.7	20.0	5.0	5.0	3.0	2.5	2.0
32.8	22.0	5.0	5.0	3.0	2.5	2.0

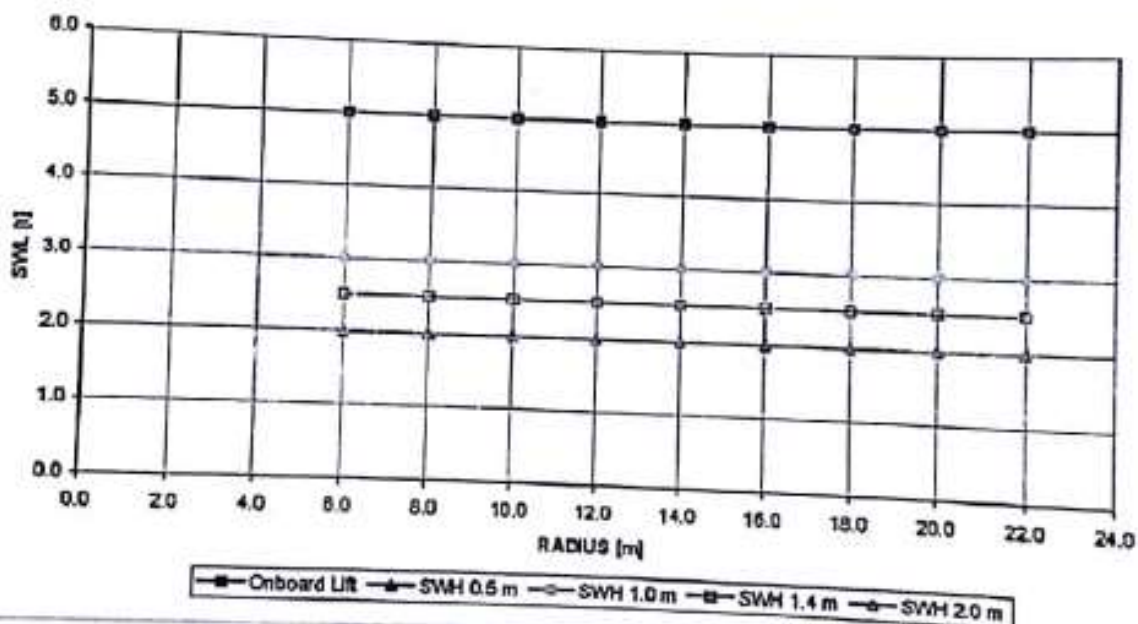

- 0 = Onboard Lift up to SWH 2.2 m
- 1 = Offboard Lift, SWH 0.5 m
- 2 = Offboard Lift, SWH 1.0 m
- 3 = Offboard Lift, SWH 1.4 m

4 = Offboard Lift, SWH 2.0 m

Operational conditions for Personnel Lift:
No personnel lift operation available

Calculation Method:
General Method based on API 2C, 6th Edition